בס"ד

SUKKAH ROOF ASSEMBLY INSTRUCTIONS


Congratulations on your purchase of a Sukkahmart Sukkah Roof!



SAFETY WARNING - Please read before use

1. Your Sukkahmart Sukkah and / or Rain Roof is intended for use in a protected garden or yard. Do not install your Sukkah in an open area which is exposed to high winds which may blow your Sukkah over.

2. If you are installing a Sukkah in an open area, we recommend that you use the Super Sukkah ONLY.

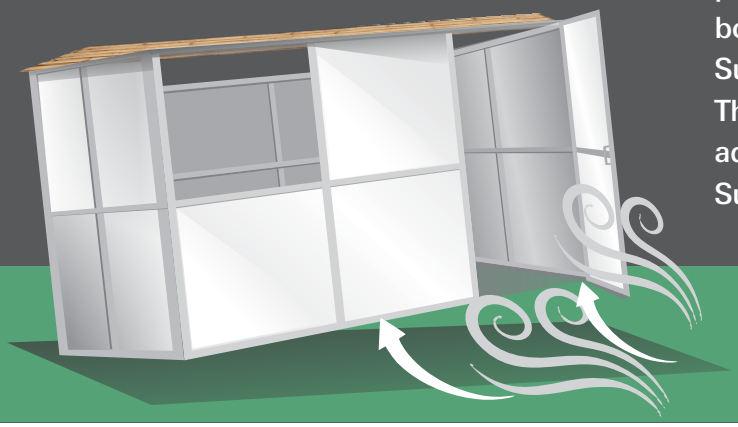


3. Wherever you place your Sukkah, it is vital that you anchor your Sukkah down so that it cannot lift off the ground. If wind lifts the Sukkah off the ground, the Sukkah may collapse upon landing. This is especially important when using a Sukkah Roof.

4. You can weigh your Sukkah down, by placing sandbags or heavy objects on the bottom horizontal beam, or, for a Hard-Walled Sukkah on the anchoring brackets supplied. The Hard-Walled Sukkah also comes with adaptors which can be used to tie-down the Sukkah, or to fix the Sukkah to your house.

SUKKAH ROOF ASSEMBLY PARTS

You will have the following parts:

A



X4

B



X2

C



X4

D



X3 for 2x2 & 2x3
X4 for 3x3 & 3x4

E



X4

F




X3 for 2x2 & 2x3
X4 for 3x3 & 3x4

G


H

I

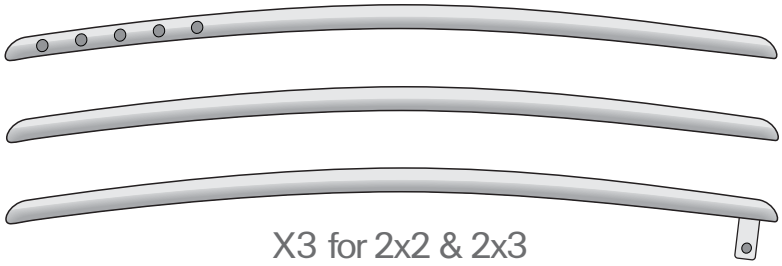

X3 for 2x2 & 2x3
X4 for 3x3 & 3x4

J




X10

K



X2


L

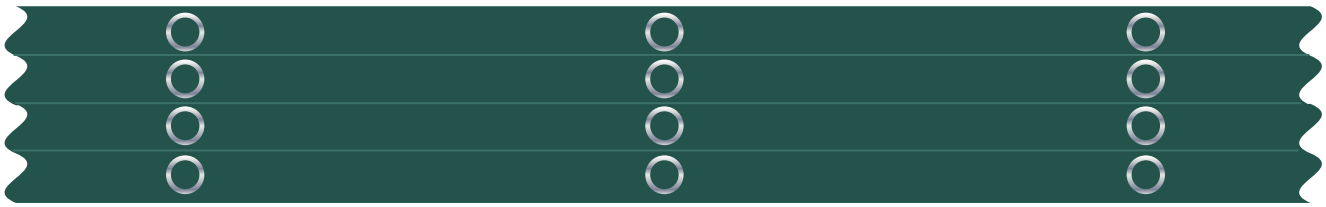

X1


This will require 2 people to assemble.

SUKKAH ROOF ASSEMBLY INSTRUCTIONS

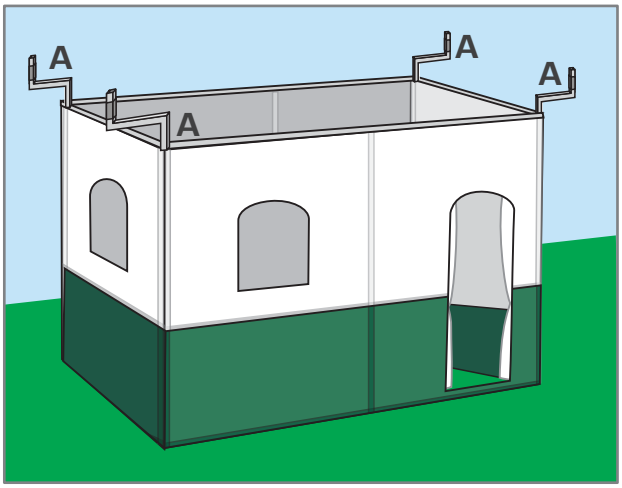


STEP 1

Take out the black stoppers from the top poles of your sukkah. Insert the Z shapes brackets into the top of each of these 4 poles.
Note: - ensure that the velcro part is facing up.
- the Z brackets should protrude outwards.

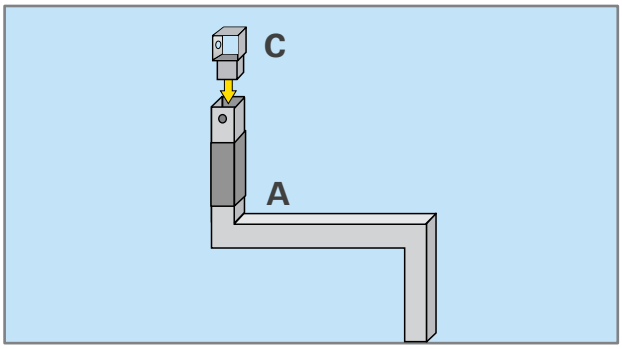


STEP 2

Insert the T brackets into the top of each Z bracket. The knobs on the side should click into place.
Note: - ensure the hole for the screw is on the outside.

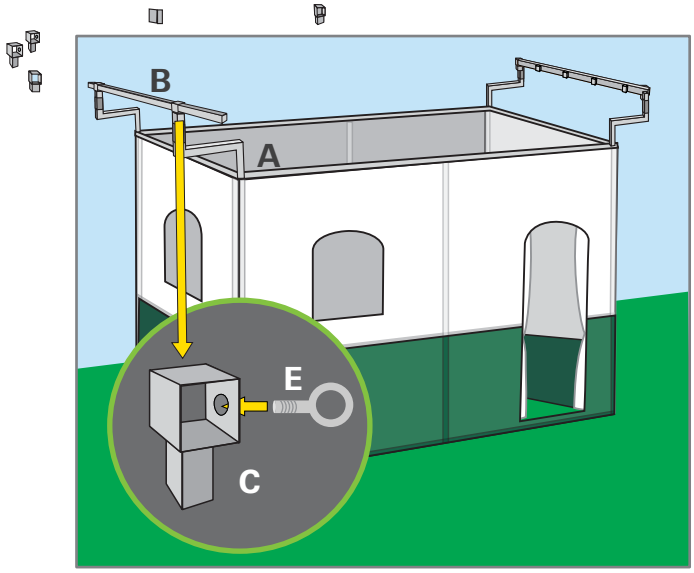


STEP 3

Take the long pole and insert it through the T bracket from one side right through to the opposite side (across the width)
Note: - ensure that the slots are facing towards the inside.
Secure the pole in place by screwing the circle screw into the T bracket
Note: - when screwing in the T bracket, ensure that the Z brackets are pushed towards each other and tightened so that the pressure holds the roof from being lifted out of the Sukkah.

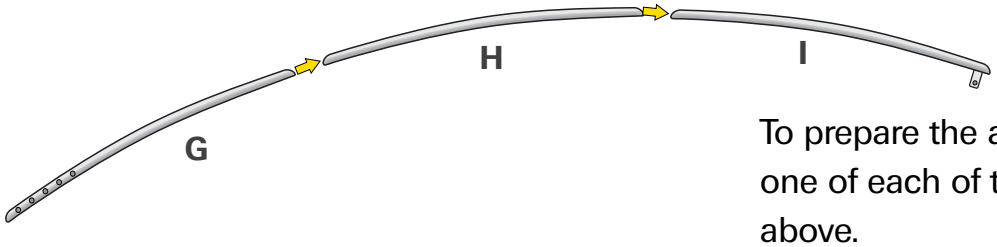


STEP 4

To prepare the arch of the roof, join together one of each of the arch pieces as shown above.

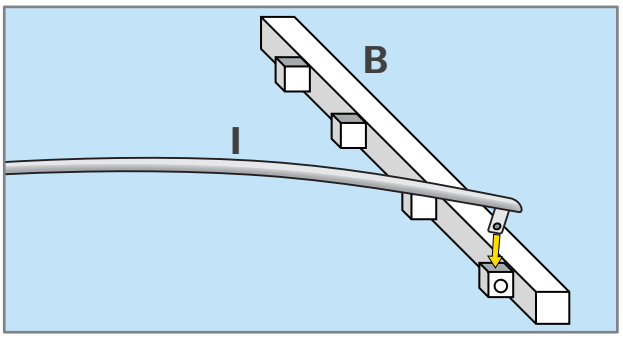

STEP 5

Insert the bracket end of the arch into the square cavities attached to the roof pole, at one side of the sukkah. Allow the other end of the arch to rest on the opposite bar.

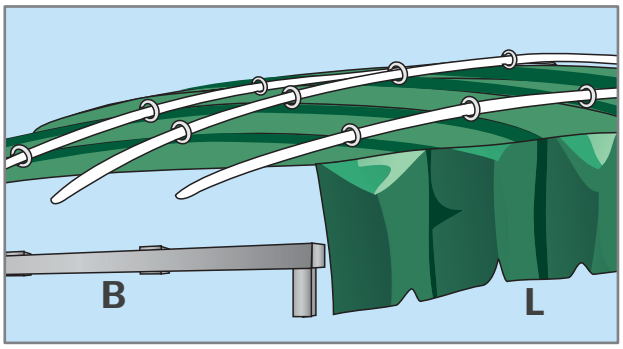

STEP 6


Lay the material onto the roof at the end that has the loose arches resting on the pole, and have the rings facing up. Feed each bar through all the rings being careful not to miss out any ring.

STEP 7

Attach the rounded brackets to the end of each pole. Secure the bracket onto the arch poles using the screw and bolt.


3x3m & 3x4m Sukkah Roof


The outer arches should have the bracket screwed into the 5th hole (counting from the end of the pole). For the centre arch, the bracket should be screwed into the 4th hole.

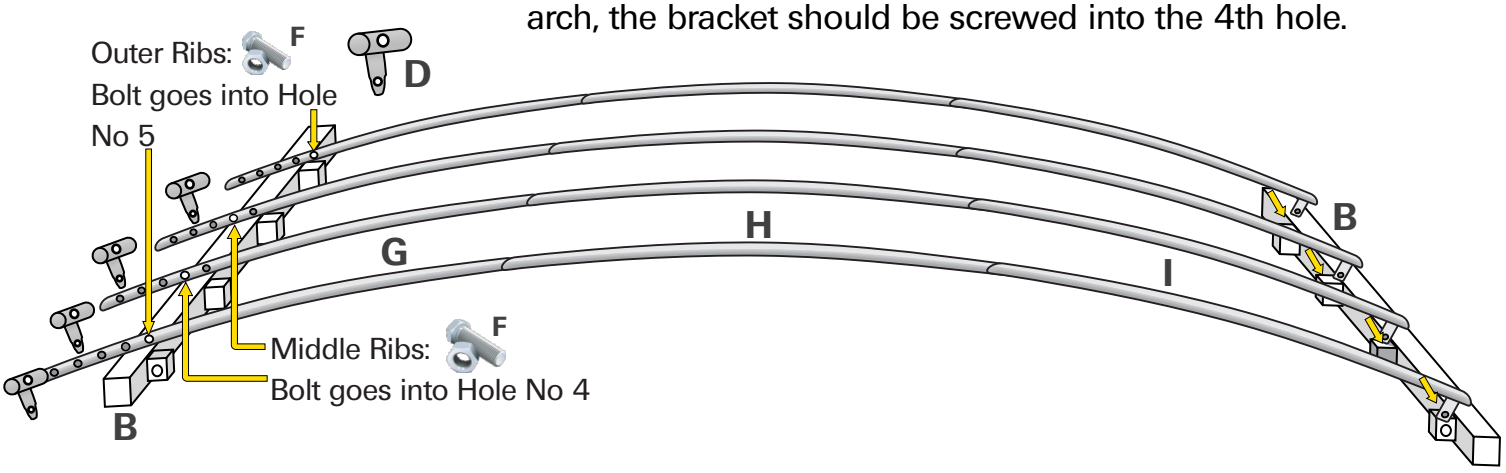

2x2m & 2x3m Sukkah Roof


The outer arches should have the bracket screwed into the 4th hole (counting from the end of the pole). For the centre arches, the bracket should be screwed into the 3rd hole.

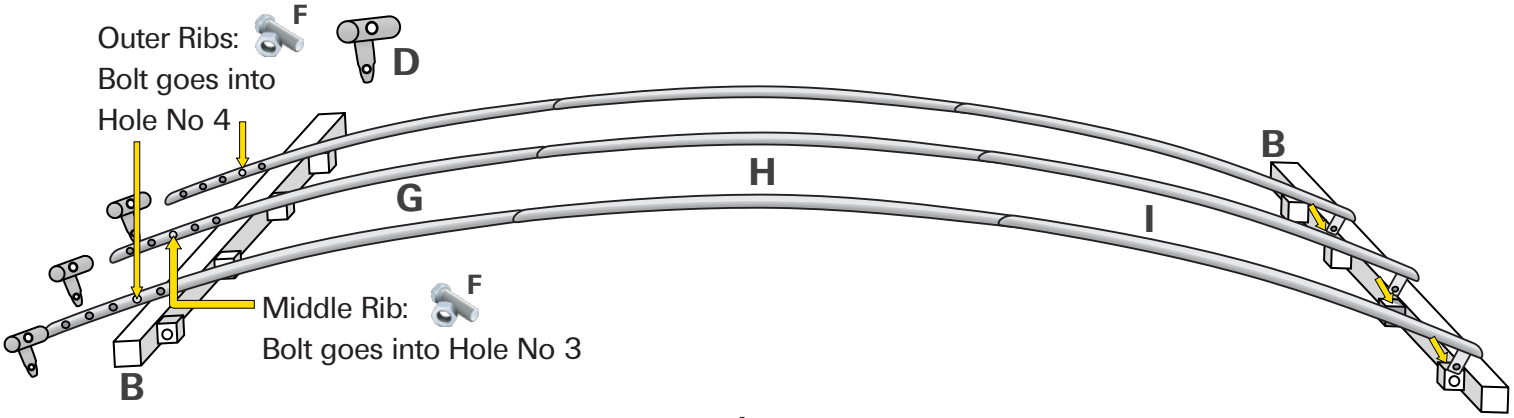

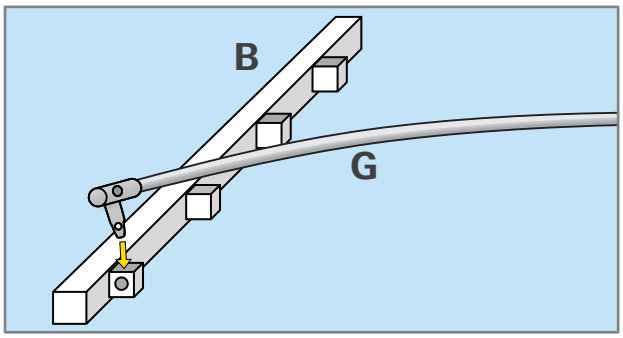


STEP 8

Insert these brackets into the square cavities on the pole.

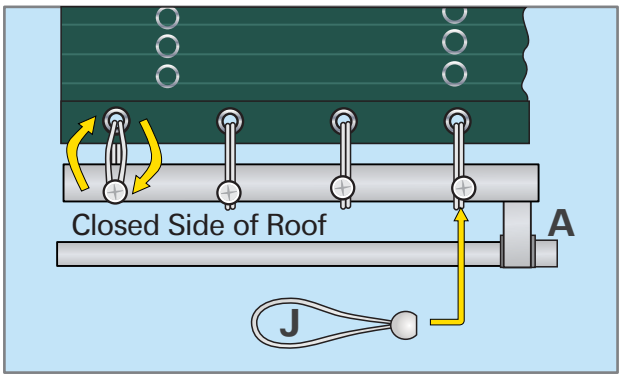


STEP 9

Take the bungees and tie them through the eyelets of the material and around the pole. Do this on just one side of the roof . This will keep the material secured to one side of the roof.

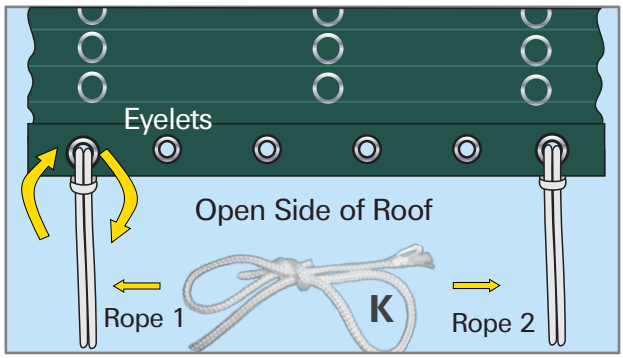

STEP 10

Take the ropes and fold each one in half. Working now on the opposite side of the material, tie each rope through an outer eyelet.

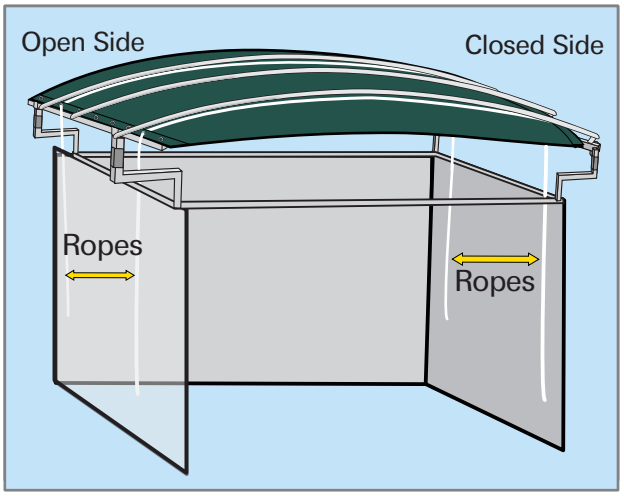

STEP 11

Now throw one half of each rope over the roof to hang down on the other side of the sukkah. Use the rope to pull the roof across the arches. These will become your ropes to open and close the sukkah roof.

You can bring the ropes into your sukkah so that you can open or close the roof from the inside.

Your roof is now complete!

For more help and instruction videos, visit
our website www.sukkahmart.co.uk